


Y-TYPE 1

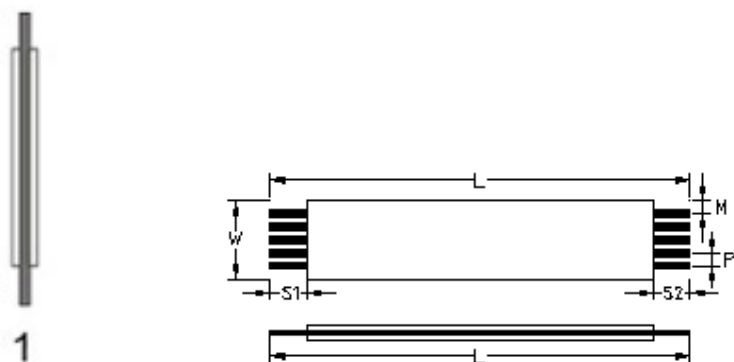

FFC SPECIFICATION									
ITEM	UNIT	STANDARD							
PITCH (P)	mm	0.3	0.5	0.8	1.0	1.25	1.27	2.0	2.54
NO. OF ELECTRONIC LINE	CORE	21~100	5~90	5~80	7~70	4~70	4~70	4~35	4~33
THICKNESS (T)	mm	0.05X0.2	0.05X0.3 0.035X0.3	0.05X0.5 0.1X0.5	0.05X0.65 0.1X0.65	0.05X0.8 0.1X0.8	0.1X0.8	0.1X0.8	0.1X1.27
TOTAL PITCH (P)	mm	0.3*(N-1)	0.5*(N-1)	0.8*(N-1)	1.0*(N-1)	1.25*(N-1)	1.27*(N-1)	2.0*(N-1)	2.54*(N-1)
CABLE WIDTH (W)	mm	0.3*(N+1)	0.5*(N+1)	0.8*(N+1)	1.0*(N+1)	1.25*(N+1)	1.27*(N+1)	2.0*(N+1)	2.54*(N+1)
MARGIN (M)	mm	0.3	0.5	0.8	1.0	1.25	1.27	2.0	2.54
STRIP LENGTH (S)	mm	1.5, 2, 3, 4, 5, 6							
END THICKNESS (E)	mm	0.13~0.4							
SUPPORTING TAPE LENGTH (B)	mm	6, 7, 8, 9, 11, 15							
TOTAL LENGTH (L)	mm	20~6000							
CONDUCTOR MATERIAL	-	TIN COATED / GOLD / FLAT COPPER WIRE							
INSULATOR MATERIAL	-	FLAME RETARDANT ADHESIVE ON YESTER FILM							
NOTE: Customize FFC Available									