


REV.	ECN.	DATE	DWN	APVD

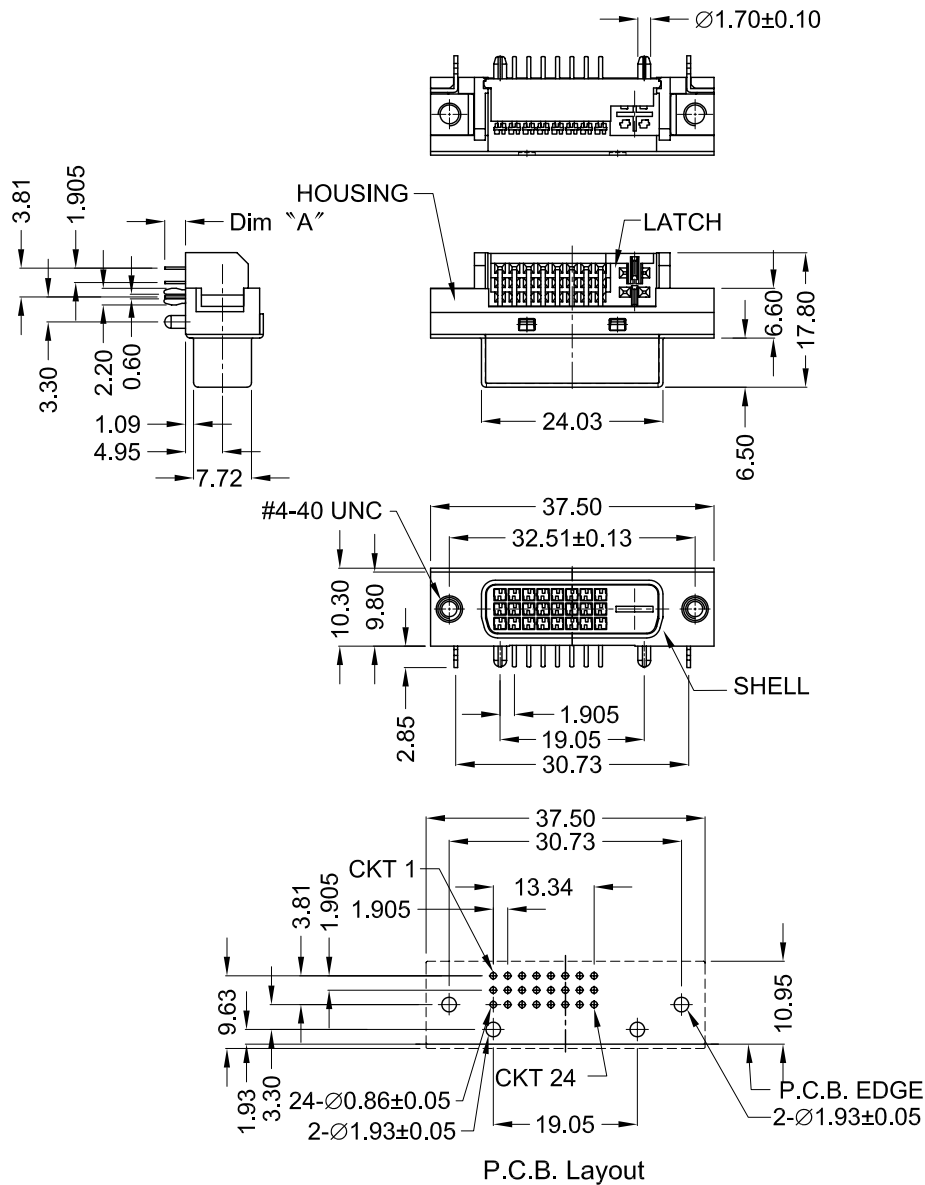

MATERIAL:

INSULATOR : NYLON 66+30%GF UL94V-0
 CONTACT : COPPER ALLOY
 CONTACT FINISH : GOLD PLATING OVER NICKEL ON CONTACT AREA, TIN PLATING ON SOLDER TAIL.
 BOARDLOCK: BRASS, TIN PLATED

SPECIFICATION:

CURRENT RATING : 1.5 AMP
 DIELECTRIC WITHSTANDING : 500V DC RMS.
 INSULATION RESISTANCE : 1000 MΩ MIN.
 CONTACT RESISTANCE : 20mΩ MAX.
 OPERATING TEMPERATURE : -20°C ~ +85°C.

ORDER INFORMATION :

DV91 - 24 0 1 N C 1 0 0 - R
 1 2 3 4 5 6 7 8 9 10

- | | |
|---|--|
| 1. SERIES NUMBER: | 9. MATING OPTION:
0=4-40 THREADED RIVETED |
| 2. POSITION :
24 | 10. GREEN PRODUCT:
R=RoHS COMPLIANT |
| 3. CONTACT TYPE:
0=FEMALE | |
| 4. CONTACT PLATING:
1= SELECTIVE GOLD FLASH
2= SELECTIVE 5u" GOLD
3= SELECTIVE 10u" GOLD
4= SELECTIVE 15u" GOLD | |
| 5. INSULATOR COLOR:
N=NATURE | |
| 6. INSULATOR MATERIAL:
C=NYLON | |
| 7. SHELL PLATING:
1=NICKEL | |
| 8.MOUNTING OPTION:
0=RIVET WITH BOARD LOCK,DIM A=2.75
1=RIVET WITH BOARD LOCK,DIM A=3.30 | |

WEKANG CO., LTD.
 維鼎股份有限公司
 TEL:886-2-26436301 FAX:886-2-26432714


SIZE A4	UNIT mm	SCALE. —	SHEET. 1 OF 1
------------	------------	-------------	------------------

GENERAL TOLERANCE
 X.X ± 0.38
 X.XX ± 0.25
 X.XXX ± 0.20
 ANGLE TOLERANCE ± 3°

DRAWN.	TRACY	DATE	07 - 11 - 2006
CHECKED.	HENRY	DATE	07 - 25 - 2006
APPROVED.	HENRY	DATE	07 - 25 - 2006

DRAWING NO.	DV91-240XNC1X0-R	C08012
TITLE.	DVI CONN. PCB RIGHT ANGLE TYPE 24 PIN FEMALE	
PART NO.	DV91-240XNC1X0-R	REV A.0

REV.	ECN.	DATE	DWN	APVD
A.1	ECN-070424-01	07/04/25	TRACY	HENRY

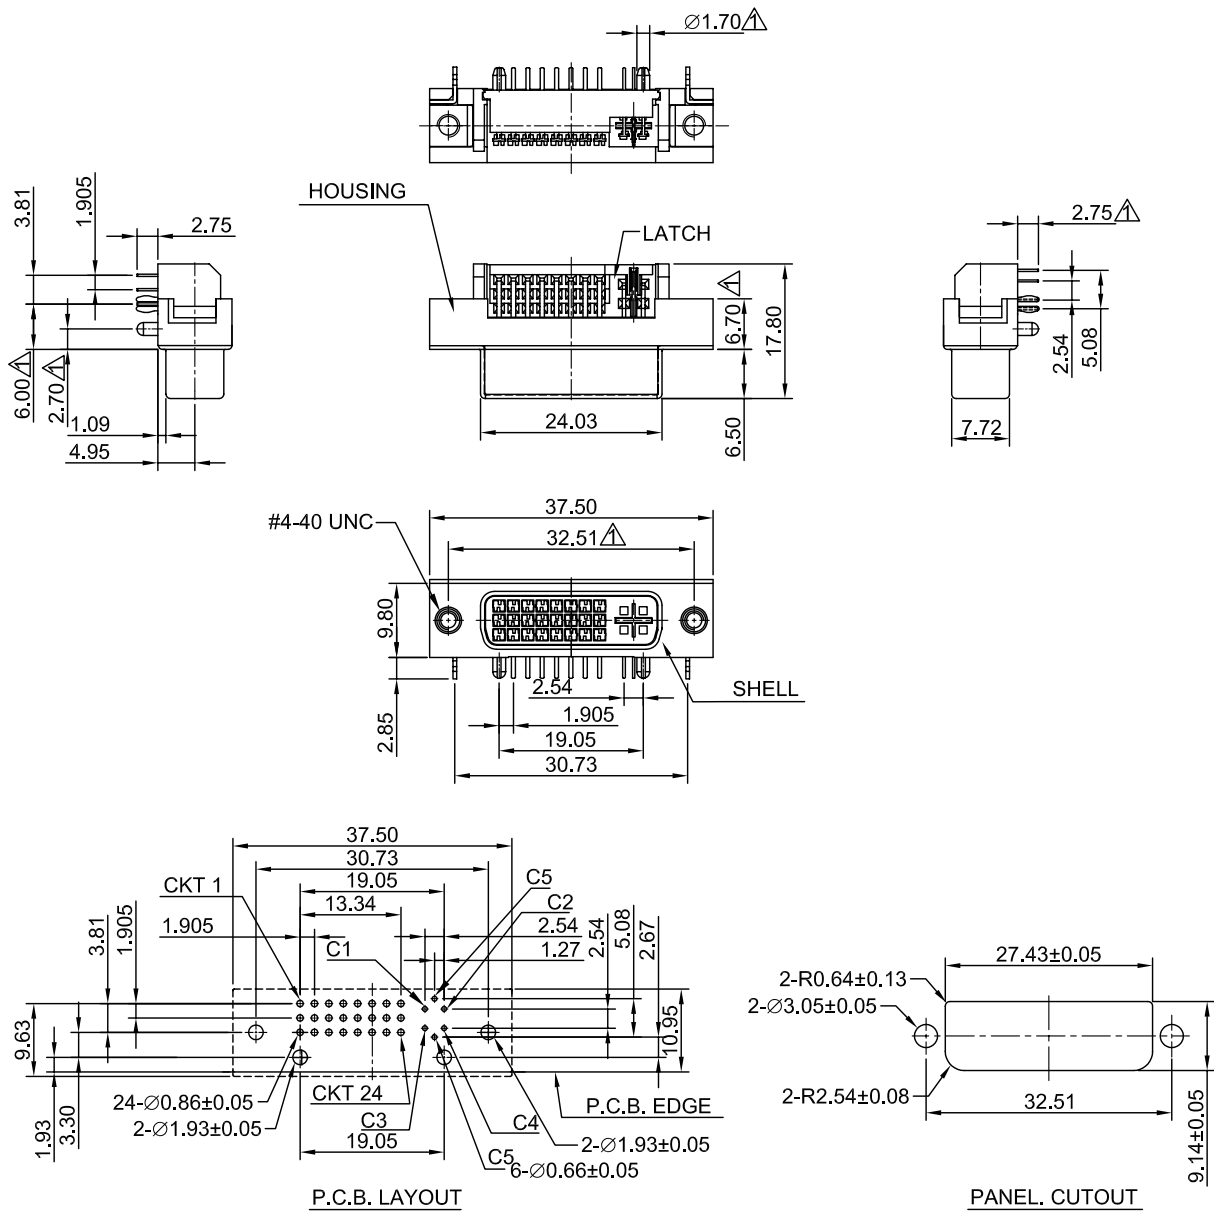

MATERIAL:

INSULATOR : NYLON 66+30%GF UL94V-0
 CONTACT : COPPER ALLOY
 CONTACT FINISH : GOLD PLATING OVER NICKEL ON CONTACT AREA, TIN PLATING ON SOLDER TAIL.
 BOARDLOCK: BRASS, TIN PLATED

SPECIFICATION:

CURRENT RATING : 1.5 AMP
 DIELECTRIC WITHSTANDING : 500V DC RMS.
 INSULATION RESISTANCE : 1000 MΩ MIN.
 CONTACT RESISTANCE : 20mΩ MAX.
 OPERATING TEMPERATURE : -20°C ~ +85°C.

ORDER INFORMATION :

D V 9 1 - 2 9 0 1 N C 1 0 0 - R
 1 2 3 4 5 6 7 8 9 10

- | | |
|---|--|
| 1. SERIES: | 6. INSULATOR MATERIAL:
C=NYLON |
| 2. POSITION :
29=29PIN | 7. SHELL PLATING:
1=NICKEL |
| 3. CONTACT TYPE/MATERIAL:
0=FEMALE/COPPER ALLOY | 8. MOUNTING OPTION:
0=RIVET WITH BOARD LOCK |
| 4. CONTACT PLATING:
1= SELECTIVE GOLD FLASH
2= SELECTIVE 5u" GOLD
3= SELECTIVE 10u" GOLD
4= SELECTIVE 15u" GOLD | 9. MATING OPTION:
0=4-40 THREADED RIVETED |
| 5. INSULATOR COLOR:
N=NATURE | 10. GREEN PRODUCT:
R=RoHS COMPLIANT |

 **WEKANG CO., LTD.**
<http://www.wekang.com>

SIZE A4	UNIT mm	SCALE. 1 : 1	SHEET. 1 OF 1
------------	------------	-----------------	------------------

GENERAL TOLERANCE X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 ANGLE TOLERANCE ± 3°	DRAWN. TRACY	DATE 07 - 11 - 2006	DRAWING NO. C-DV0003	CUSTOMER DRAWING	
	CHECKED. HENRY	DATE 07 - 25 - 2006	TITLE. DVI CONN. PCB RIGHT ANGLE TYPE 29 PIN FEMALE		
	APPROVED. HENRY	DATE 07 - 25 - 2006	PART NO. DV91-290XNC100-R	REV	A.1